

DATASHEET
WALL-MOUNT
& SOHO RACKS
iSEVEN REN

CONTEG

iSEVEN REN




REN-10-60/40

➤ **Wall-Mount iSEVEN REN racks** are ready for daily use, with an unmatched ratio between price, utility value and quality.

MAIN ADVANTAGES


- Easy access to installed equipment via front door
- Easy hanging with removable rear panel
- Load rating up to 50 kg

COLOR: RAL 7035



Removable rear panel

Code	H (in U)	Dimensions (mm)				Dimensions incl. packing (mm)			Gross weight (kg)
		H	W	D	Useful depth	H	W	D	
REN-06-60/30	6	332	530	300	250	350	555	339	9
REN-06-60/40	6	332	530	400	350	350	555	439	10
REN-10-60/40	10	510	530	400	350	535	555	439	12
REN-12-60/40	12	599	530	400	350	655	555	439	15.5
REN-15-60/40	15	732	530	400	350	758	555	439	16
REN-06-60/50	6	332	530	500	450	350	555	539	12
REN-10-60/50	10	510	530	500	450	535	555	539	17
REN-12-60/50	12	599	530	500	450	655	555	539	18
REN-15-60/50	15	732	530	500	450	758	555	539	21

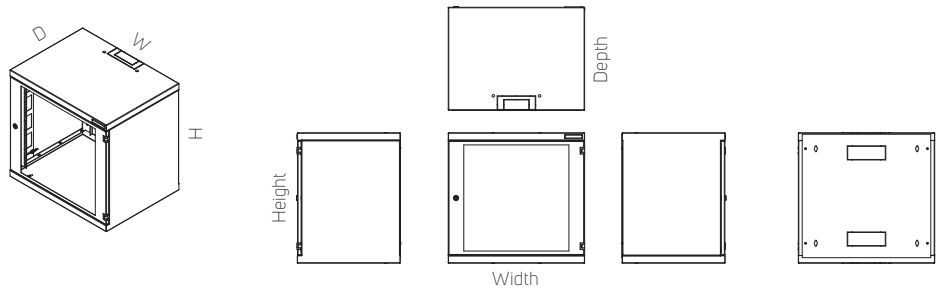

DESCRIPTION

Sizes

- Height: 6, 10, 12, 15U
- Width: 530 mm
- Depth: 300, 400 or 500 mm

Construction

- 1mm/1,25mm sheet steel

Load rating

- Standard 50 kg balanced load

IP rating

- Standard IP 30

Colors

- Standard RAL 7035

Front door

- Tinted security-glass (EN 12150-1) or sheet steel door
- Reversible door—easy re-hanging to open right or left (at installation site)
- Door opening angle 180°

Cable entries

- Top and bottom openings for knock-out cable entry, size 100×42 mm and 150×56 mm
- Cable entries on rear edge of enclosure for straight cable path alongside wall

Rear panel

- Removable, with module for cable entry
- Easy wall installation, first the rear panel and on it the switchboard is fitted

STANDARD CONFIGURATION:

- 1 pair sliding 19" vertical extrusions
- Tinted security-glass door (EN 12150-1) with lock
- GND/earthing kit

CONTEG, spol. s r.o.

Na Vitezne plani 1719/4

140 00 Prague 4

Czech Republic

Tel.: +420 565 300 358

conteg@conteg.com

www.conteg.com

CONTEG